


# FAP-520 Automatic Fire Detectors LSN improved version



- ▶ Modern, ultra-flat design
- ▶ Smooth, easily-cleaned detector surface
- ▶ Innovative fastening mechanism
- ▶ High reliability
- ▶ Maintains LSN loop functions in the event of wire interruption or short-circuit thanks to two integrated isolators
- ▶ Extended system parameters of improved LSN technology

The FAP-520 Automatic Fire Detectors combine the advantages of the improved LSN technology with the aesthetic benefits of flush-mounted installation and the option to choose the color. The detectors are specially designed for connection to the Local SecurityNetwork LSN improved version with the significantly extended system parameters. The FAP-520 is available as a scattered light smoke detector or as a multi-sensor detector with an additional gas sensor. The respective versions of the detectors are available in white or transparent with color toning inserts.

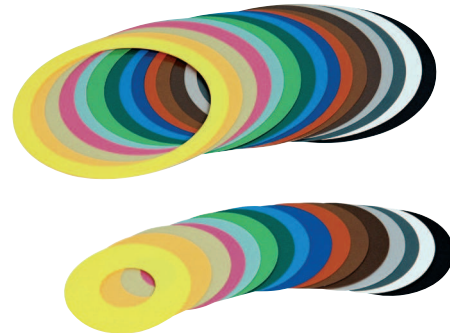

## Functions


The smooth, flush-installation surface means the detectors can be installed in areas with high aesthetic requirements. In addition, the detectors are suitable for areas with heightened dust exposure. The detectors and trim rings in the transparent version with color inserts are supplied complete with reversible printed color ring sets, offering a choice of 16 colors for individual color matching.



### Notice

**The images in this document are not to be used for reliable color determination.**

For reliable color determination use original RAL color guides.

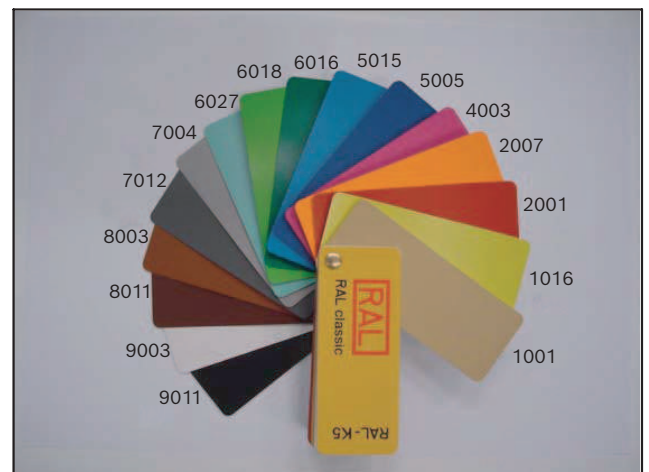

**Sensor technology and signal processing**

All detectors in the FAP-520 Series are equipped with two optical sensors and a pollution sensor. The FAP-OC-520 multisensor detector contains a gas sensor as an additional detection channel.

The individual sensors can be programmed with FSP-5000-RPS programming software via the LSN network.

All sensor signals are constantly analyzed by the internal signal evaluation electronics and are linked with each other through algorithms.

By linking the optical sensors and the gas sensor, the OC detector can also be used in places where the work carried out gives rise to small amounts of smoke, steam or dust.


The alarm will only be triggered automatically if the signal combination corresponds with the characteristic diagram of the installation location that was selected during configuring. Consequently, a very high reliability against false alarms is obtained.

When 50% of the alarm threshold is reached, a pre alarm is signaled (displayed in the event database of the fire panel).


**Optical sensor (smoke sensor)**

The optical sensor (1) operates according to the scattered light method.

The LEDs (3) transmit light at a defined angle into the scattered light area (7).



In case of fire, the light is scattered by the smoke particles and strikes the photo diodes (2), which transform the quantity of light into a proportional electrical signal.

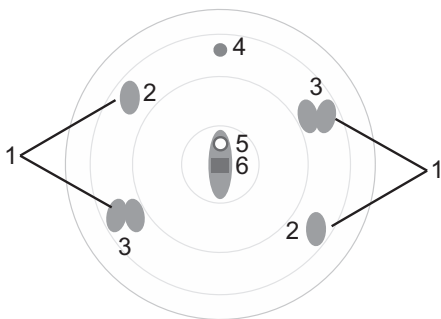

Interference effects from daylight and commercial lighting sources are filtered out with an optical daylight filter and by the use of electronic filtering and phase-locked rectification (ambient light stability: glare test DIN EN 54-7).

The various light-emitting and photo diodes of the sensor are individually controlled by the detector electronics. Consequently, signal combinations are produced that are independent of each other and ideally suitable for the detection of smoke, which

makes it possible to differentiate between smoke and interference agents (insects, objects). In addition, the time characteristics and the correlation of the optical sensor signals for the fire or interference detection are evaluated.

Moreover, plausibility checking of the various signals makes it possible to detect errors in the analysis electronics and the LEDs.

**Chemical sensor (CO gas sensor)**

The gas sensor (4) detects mainly the carbon monoxide (CO) that is produced by a fire, but it also detects hydrogen (H) and nitrogen monoxide (NO). The basic measuring principle is CO oxidation on an electrode and the measurable current that arises from this. The sensor signal value is proportional to the concentration of gas.

The gas sensor delivers additional information to effectively suppress deceptive values.

The CO sensor is monitored by measuring the internal capacity. If the capacity lies outside the permitted range, an error message is output on the fire panel. In this case, the detector continues to operate purely as a scattered light smoke detector. Depending on the service life of the gas sensor, the FAP-OC 520 Fire Detector switches off the C sensors after five years of operation. The detector will continue to function as an O detector. The detector should then be exchanged immediately in order to be able to keep using the higher reliability of detection of the OC detector.

**Pollution sensor**

The contamination level on the detector surface is continually measured by the pollution sensor (6); the result is evaluated and indicated in three stages on the fire panel.

Contamination of the detector surface leads to active adaptation of the threshold (drift compensation) and to a fault indication in the case of heavy contamination.

**Improved LSN features**

The detectors offer all the features of the improved LSN technology:

- Flexible network structures, including "T-tapping" without additional elements
- Up to 254 LSN improved elements per loop or stub line
- Automatic or manual detector addressing selectable via rotary switch, in each case with or without auto-detection
- Power supply for connected elements via LSN bus
- Unscreened fire detection cable can be used
- Cable length up to 3000 m (with LSN 1500 A)
- Downwards compatibility to existing LSN systems and control panels.

In addition, the detectors offer all the established benefits of LSN technology. The following data can be read out for each configured detector:

- Serial number

- Contamination level of the optical section,
- Operating hours
- Current analog values.

In the event of an alarm, individual detector identification is transmitted to the fire panel. The sensor is self-monitoring. The following errors are indicated on the fire panel:

- Failure of the evaluation electronics or one of the LEDs on the optical sensor
- Heavy contamination (instead of false alarm)
- Failure of the CO sensor (if present).

**Further performance characteristics**

Various operating states are indicated on the detector by means of a clearly visible two-color LED. In the event of an alarm, the LED flashes red. The innovative detector locking, which operates on the ballpoint-pen principle, provides fast and simple insertion and replacement of the detector. We recommend the specially developed FAA-500-RTL exchanger device, especially in the case of high installation heights. To allow convenient detector testing, the FAA-500-TTL test adapter with magnet and additional service accessories is available. The control of an external detector alarm display is possible. Preservation of the LSN loop function is guaranteed in the event of wire interruption or short circuit by means of integrated isolators.

**Regulatory information**


Region	Regulatory compliance/quality marks	
Europe	CE	FAP-520/FAA-500-R
	CPR	0786-CPR-20201 FAP-O 520 / 520-P
	CPR	0786-CPR-20202 FAP-OC 520 / 520-P
Germany	VdS	G 205119 FAP-OC 520/520-P_G205119
	VdS	G 205125 FAP-O 520/520-P_G205125
Hungary	TMT	TMT-20/2006-2011 FAP-O 520, FAP-O 520-P
	TMT	TMT-21/2006-2011 FAP-OC 520, FAP-OC 520-P
Morocco	CMIM	FAP-520
Macao Special Administrative Region Government	CB	0783/DT/SEL/2011

Region	Regulatory compliance/quality marks	
Ukraine	MOE	UA1.016.0002820-10 FAP-O520 -P _FAA-500 -R

**Installation/configuration notes**

- Connectable to Bosch fire panels with the improved LSN system parameters.
- With classic mode, can be connected to the LSN fire panels BZ 500 LSN, UEZ 2000 LSN, UGM 2020 and to other panels or their receiver modules with identical connection conditions, although with the previous LSN system parameters.
- The detectors must be installed exclusively in the FAA-500 LSN Bases provided. In addition, the detector base must be installed in an FAA-500-BB Ceiling Mount Back Box or in an FAA-500-SB Surface Mount Back Box.

- i Notice**  
**Flush ceiling mounting with FAA-500-BB**  
 The false ceiling may have a maximum thickness of 32 mm. Above the false ceiling, a free height of at least 110 mm is required.
- The detectors are not intended for outdoor use.
- A hemispherical space with a radius of 50 cm must remain free below the detectors.

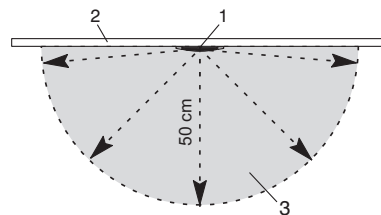

- 1 Detector
- 2 Ceiling
- 3 Hemispherical space below the detector

- Care must be taken to ensure that neither people, large animals, plants, swinging doors nor any objects intrude into this area and that no parts of the detector surface become covered.
- The detectors may only be installed in a position which is out of arm's reach. We therefore recommend a minimum installation height of 2.70 m.
- The detectors may not be installed in rooms in which data is transmitted by means of high-intensity infrared light (e.g. in rooms with IR systems for interpreters).
- The detectors must be mounted so that they are not exposed to any direct sunlight.
- A minimum distance of 50 cm from lamps must be maintained. The detectors may not be mounted in a cone of light from lamps.

- By default, the bases are equipped with a spring for mounting the detector in concrete and wooden ceilings. This spring is identifiable by the red marking. When mounting a detector in a false ceiling panel you can use the additional, softer spring in the package. In this use case, the detector must not be subjected to strong vibrations (> 350 m/s).
- Maximum permitted air speed: 20 m/s.
- Country-specific standards and guidelines must be observed during the planning phase.

**Installation/configuration notes in accordance with VdS/VDE**

- The FAP-OC 520, like the FAP-O 520, is planned according to the guidelines for optical detectors (see DIN VDE 0833 Part 2 and VDS 2095).

**Technical specifications**

**Electrical**

Operating voltage (VDC)	15 VDC – 33 VDC
Current consumption (mA)	3.25 mA
Alarm output	Per data word by two-wire signal line
Indicator output	Open collector connects 0 V over 1.5 kΩ through, max. 15 mA

**Mechanical**

Dimensions (Ø x H) (mm) detector; detector with base	113 mm x 55 mm; 113 mm x 70 mm
Dimensions (Ø x H) (mm) detector with trim ring; detector with trim ring and base	150 mm x 55 mm; 150 mm x 70 mm
Dimensions (Ø x H) (mm) detector with trim ring, base and ceiling mount back box	150 mm x 110 mm
Material	Plastic
Color (RAL) detector housing	White, similar to RAL 9003
Color detector front plate FAP-O 520   FAP-OC 520	White, similar to RAL 9003

Color detector front plate FAP-O 520-P   FAP-OC 520-P	Transparent; Silver gray
Weight (g), approx. FAP-O 520   FAP-O 520-P	170 g
Shipping weight (g), approx. FAP-O 520   FAP-O 520-P	360 g
Weight (g), approx. FAP-OC 520   FAP-OC 520-P	180 g
Shipping weight (g), approx. FAP-OC 520   FAP-OC 520-P	370 g
Weight (g) trim ring	30 g
Shipping weight (g) trim ring	60 g

**Environmental**

Operating temperature (°C) FAP-O 520   FAP-O 520-P	-20 °C – 65 °C
Operating temperature (°C) FAP-OC 520   FAP-OC 520-P	-10 °C – 50 °C
Operating relative humidity, non-condensing (%)	0% – 95%
Permissible air speed (m/s)	20 m/s
IP rating FAP-O 520   FAP-O 520-P	IP53
IP rating FAP-OC 520   FAP-OC 520-P	IP33

**Planning**

Monitoring area (m <sup>2</sup> )	120 m <sup>2</sup> Observe local guidelines.
Installation height (m)	2.70 m – 16 m

	The detector may only be installed in a position which is out of arm's reach. Given minimum installation height is recommended by Bosch. Observe local guidelines.
Minimum distance to lamps	0.5 m
Maximum thickness of the false ceiling	32 mm
Required bore hole	Ø 130 mm (-1 mm/+5 mm)
Mounting depth	110 mm
Free height above false ceiling, at least	110 mm

**Characteristics**

	FAP-OC 520   FAP-OC 520-P	FAP-O 520   FAP-O 520-P
Detection principle	Combination of scattered light measurement and combustion gas measurement	Scattered light measurement
Special features	Contamination detection Drift compensation in optical unit and in gas unit	Contamination detection Drift compensation in optical unit
Address setting	Manual or automatic address setting via rotary switches	
Response sensitivity of optical section (EN 54-7)	< 0.36 dB/m	< 0.18 dB/m
Response sensitivity of gas sensor section	in ppm range	-
LED color	Red; Green (alarm mode; test mode)	

**Ordering information**

**FAP-O 520 Smoke detector optical, white**  
 analog addressable detector with optical sensor, ultra-flat design  
 Order number **FAP-O 520**

**FAP-O 520-P Smoke detector, optical, color inserts**  
 analog addressable detector with optical sensor and ultra-flat design, transparent with color inserts  
 Order number **FAP-O 520-P**

**FAP-OC 520 Detector, optical/chemical, white**  
 analog addressable detector with optical and chemical sensor, ultra-flat design  
 Order number **FAP-OC 520**

**FAP-OC 520-P Detector optical/chemical, color inserts**  
 analog addressable detector with optical and chemical sensor, ultra-flat design, transparent with color inserts  
 Order number **FAP-OC 520-P**

**Accessories**

**FAA-500-TR-W Trim ring, white**  
 for 500 and 520 Series Fire Detectors  
 Order number **FAA-500-TR-W**

**FAA-500-TR-P Trim ring, colored**  
 for 500 and 520 Series Fire Detectors  
 Order number **FAA-500-TR-P**

**FAA-500 Detector base**  
 for installation of the FAP-520 Fire Detector  
 Order number **FAA-500**

**FAA-500-R Base with relay**  
 Base with relay for installation of the FAP-520 Fire Detector.  
 Order number **FAA-500-R**

**FAA-500-BB Back box ceiling-mount**  
 for ceiling flush installation in false ceilings when mounting 500 and 520 Series Bases and Fire Detectors  
 Order number **FAA-500-BB**

**FAA-500-CB Housing for concrete ceilings**  
 for installing 500 and 520 Series Fire Detectors in concrete ceilings. In addition, you need to order a FAA-500-BB Back box ceiling-mount.  
 Order number **FAA-500-CB**

**FAA-500-SB-H Back box for damp rooms, surface-mount**  
 for special applications where it is not possible to flush-mount the 500 and 520 Series Fire Detectors in a ceiling  
 Order number **FAA-500-SB-H**

**FAA-500-SPRING Spring for wooden/concrete ceilings**  
 (DU = 10 units)  
 Order number **FAA-500-SPRING**

**Services**

**EWE-FAP520-IW 12 mths wrty ext FAP520 detector**  
 12 months warranty extension  
 Order number **EWE-FAP520-IW | F.01U.360.733**



<https://www.boschsecurity.com>